


## DELUXE FLAG ARRANGEMENTS



Arrangement for flag size 6' x 10' or smaller




Shock spring and Safety Cable supplied with arrangements for 8' x 12' or larger flag sizes

Constructed of 1/8" stainless steel aircraft cable with a stainless steel thimble attached at each end with 2 copper crimps. These flag arrangements provide the method of attaching the flag or flags to the cable assembly. This is also an excellent method for changing the quantity of flags or the size(s) of flag(s) without having to change the entire cable assembly. Deluxe flag arrangements are supplied with either 2 or 3 stainless steel quick links depending on the recommended flag size, flag snaps, shock spring where needed and safety cable where needed.

MODEL	ITEM #	FOR FLAG SIZE	SUPPLIED WITH				1-5	6+	LBS.
			QUICK LINKS	FLAG SNAPS	SHOCK SPRING	SAFETY CABLE			
FA2	360474	2' x 3'	2	2 (STAINLESS STEEL SSFS-1)	—	—	\$61	\$57	1.2
FA25	360475	2-1/2' x 4'	2	2 (STAINLESS STEEL SSFS-1)	—	—	69	60	1.3
FA3	360476	3' x 5'	2	2 (STAINLESS STEEL SSFS-1)	—	—	70	61	1.3
FA4	360477	4' x 6'	2	2 (STAINLESS STEEL SSFS-1)	—	—	73	66	1.3
FA5	360478	5' x 8' or 5' x 9-1/2'	2	2 (STAINLESS STEEL SSFS-1)	—	—	77	70	1.4
FA6	360479	6' x 10'	2	2 (STAINLESS STEEL SSFS-1)	—	—	84	77	1.4
FA8	360480	8' x 12'	3	2 (STAINLESS STEEL SSFS-2)	1	1	120	108	2.3
FA10	360481	10' x 15' or 10' x 19'	3	2 (STAINLESS STEEL SSFS-2)	1	1	122	111	2.6
FA12	360482	12' x 18'	3	2 (STAINLESS STEEL SSFS-2)	1	1	130	118	2.6
FA15	360483	15' x 25'	3	2 (STAINLESS STEEL SSFS-2)	1	1	135	122	2.7
FA20	360484	20' x 30' or 20' x 38'	3	2 (STAINLESS STEEL SSFS-2)	1	1	141	127	2.9
FA25	360485	25' x 40'	3	2 (STAINLESS STEEL SSFS-2)	1	1	145	130	3.6
FA30	360486	30' x 50' or 30' x 60'	3	2 (STAINLESS STEEL SSFS-2)	1	1	149	132	4.4

## CABLE ASSEMBLIES

Constructed of 1/8" and/or 3/16" stainless steel aircraft cable incorporating a stainless steel swivel to minimize the effect of unraveling due to the rotation of the truck assembly. The lower cable section has a copper cable stop attached to one end for installation into a stainless steel winch. This cable stop can easily be removed if the winch is an "M"-type which does not require a cable stop. The upper cable section is supplied with a stainless steel thimble, 2 copper crimps, and two ball cable stops, however, because this section must be threaded through the truck assembly, these parts are not attached to the cable before shipment and must be attached in the field. These standard cable assemblies are designed for flagpoles with a winch installed at 4' above grade.

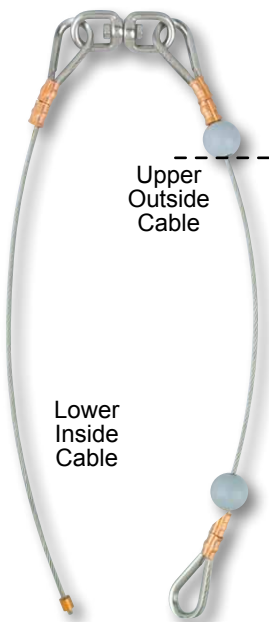

ITEM #	EXPOSED HT. OF FLAGPOLE	LOWER INSIDE CABLE		UPPER OUTSIDE CABLE		1-5	6+	LBS.
		DIA.	LEN.	DIA.	LEN.			
360056	20'	3/32"	20'	1/8"	20'	\$97	\$88	1.4
360332	25*	3/32"	25'	1/8"	25'	108	95	1.6
360057	25'	1/8"	25'	1/8"	25'	108	95	1.9
360333	30*	3/32"	30'	1/8"	30'	114	102	1.9
360058	30'	1/8"	30'	1/8"	30'	114	102	2.2
360334	35*	3/32"	35'	1/8"	35'	122	111	2.1
360059	35'	1/8"	35'	1/8"	35'	122	111	2.5
360060	40'	1/8"	40'	3/16"	40'	133	121	4.2
360061	45'	1/8"	45'	3/16"	45'	139	126	4.6
360062	50'	1/8"	50'	3/16"	50'	152	136	5.1
360063	60'	1/8"	60'	3/16"	60'	188	172	6.1
360064	70'	1/8"	70'	3/16"	70'	202	180	7.0
360065	78'	1/8"	78'	3/16"	78'	208	188	7.8
360066	80'	1/8"	80'	3/16"	80'	215	196	8.0
360067	90'	1/8"	90'	3/16"	90'	272	245	8.9
360068	100'	1/8"	100'	3/16"	100'	290	265	9.9
360069	110'	1/8"	110'	3/16"	110'	302	272	11
360070	120'	1/8"	120'	3/16"	120'	307	277	12
360071	130'	1/8"	130'	3/16"	130'	353	320	13
360072	140'	1/8"	140'	3/16"	140'	366	327	14
360073	150'	1/8"	150'	3/16"	150'	390	353	15
360074	160'	1/8"	160'	3/16"	160'	416	378	16
360075	170'	1/8"	170'	3/16"	170'	441	398	17
360076	180'	1/8"	180'	3/16"	180'	492	441	18
360077	190'	1/8"	190'	3/16"	190'	528	476	19
360078	200'	1/8"	200'	3/16"	200'	580	521	20

\*To be used with 5" diameter poles with our M-5 Winch installed. Cable Assemblies can be mixed to achieve higher quantity pricing.